


ACE-706AM

60 W AC-DC Open Frame Medical AT Power Supply

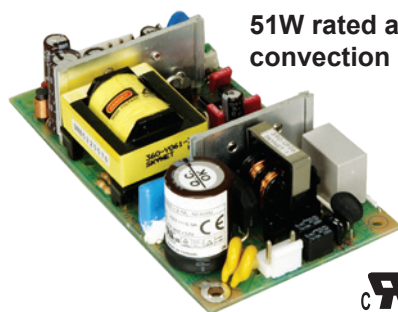

51W rated and 80W peak under
convection cooling environment

Medical

CB CE



IDE device connector




SATA device connector

Input Type	90 ~ 264 VAC Full Range			
Input Frequency	47 Hz ~ 63 Hz			
Input Current	2 A (RMS)@115V, 1 A (RMS)@230V			
Inrush Current	30 A max. for 115VAC, 60 A max. for 230VAC			
Output Voltage	Voltage	Min. load	Max. load	Ripple & Noise
	+5 V	0 A	4.5 A	1%
	+12 V	0 A	4 A	1%
Efficiency	-12 V	0 A	0.3 A	1%
	82%			
Temperature	Operating: 0°C ~ 70°C, Storage: -40°C ~ 85°C			
MTBF (hrs)	100,000			
Output Connector	Optional cable			
Dimensions	63.5 x 114.3 x 32.4 (mm), 2.5 x 4.5 x 1.28 (inch)			

Ordering Information

Part No.	Description
ACE-706AM-RS	60W AC-DC Open Frame Medical AT Power Supply, RoHS

Dimensions (Unit: mm)

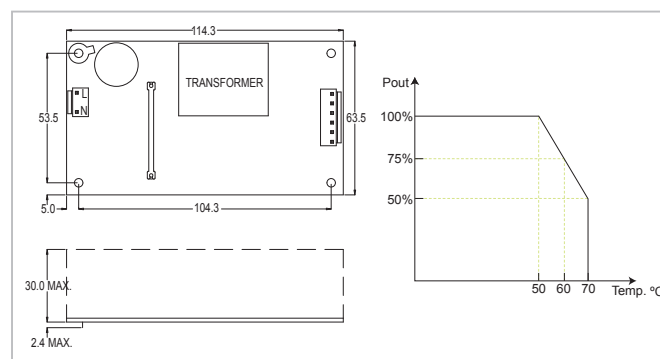

Open Frame DC Input AT Type

ACE-890C

DC Input Open Frame AT Power Supply




Input Type	18 ~ 36 VDC				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
	10 A	2.5 A		0.5 A	
Efficiency	70%				
Temperature	0°C ~ 50°C (Operating), -20°C ~ 85°C (Storage)				
MTBF (hrs)	251,000 (ACE-890C), 265,000 (ACE-890P)				
Output Connector	Optional cable				
Dimensions (mm)	152.4 x 89 x 39				

Ordering Information

Part No.	Description
ACE-890C-RS	86W 24V DC Input Open Frame AT Power Supply

Dimensions (Unit: mm)

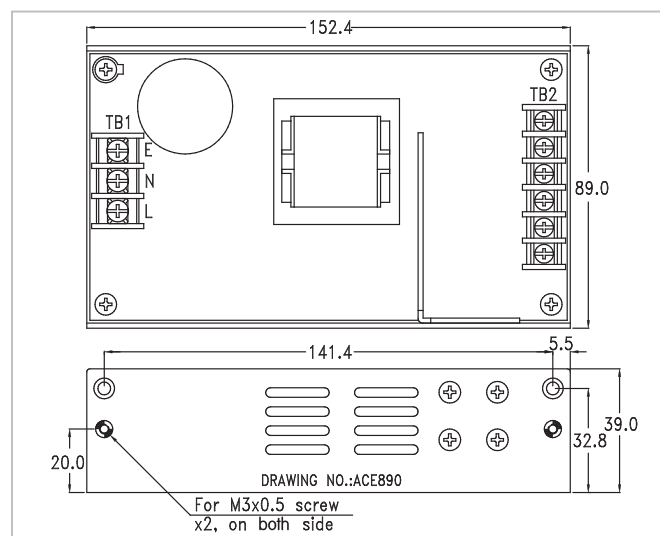

1

Industrial
Computing
Solutions

2

Video
Capture
Solutions

3

Industrial
System

4

Industrial
Computer
Chassis

5

Power Supply/
Peripherals