


# PCI-8554

## 10-CH General Purpose Timers/Counters & 8-CH DIO Card

### Features

- Supports a 32-bit 5 V PCI bus
  - Onboard four 8254 programmable timer/counter chips
  - 10-CH independent 16-bit down counters
  - 1-CH 32-bit cascaded timer
  - Onboard 8 MHz clock source
  - Four programmable clock sources for each timer/counter
  - Programmable de-bounce filters for external clock & external interrupt inputs
  - Programmable interrupt sources
  - 8-CH TTL digital inputs & 8-CH TTL digital outputs
  - +12 V and +5 V power available on the connector
  - Onboard resettable fuses for power output protection
- **Operating Systems**
    - Windows Vista/XP/2000/2003
    - Linux
  - **Recommended Software**
    - VB.NET/VC.NET/VB/VC++/BCB/Delphi
    - DAQBench
  - **Driver Support**
    - DAQPilot for Windows
    - DAQ-LVIEW PnP for LabVIEW™
    - DAQ-MTLB for MATLAB®
    - PCIS-DASK for Windows
    - PCIS-DASK/X for Linux

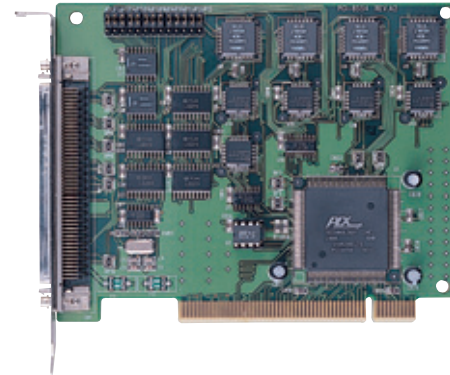

### Introduction

ADLINK PCI-8554 is a 10-CH 16-bit timer/counter and digital I/O cards. It provides ten independent timer/counters and one cascaded 32-bit timer. The clock source for each timer/counter can be software selected from the cascaded 32-bit timer, external clock source, timer/counter output of the last channel, and the onboard 8 MHz clock. The flexible architecture makes it easy to re-configure the hardware; for example, up to ten timer/counters can be cascaded to form a 160-bit timer/counter. The hardware can also generate interrupts from either the external interrupt sources or the output of the cascaded 32-bit timer.

The programmable de-bounce filters provide eleven channels of glitch-filtered external clock inputs for timer/counters and the external interrupt input. This feature further improves the reliability for counting applications.

The PCI-8554 also provides 8-CH TTL digital inputs and 8-CH TTL digital outputs. ADLINK PCI-8554 delivers cost-effective and reliable solutions for event counting, frequency measurement, baud-rate generation, watchdog timer, and other industrial applications.

### Specifications

#### General-Purpose Timer/Counters

- Number of channels: 10
- Counter width: 16 bits
- Compatibility: 5 V/TTL
- Base clock available: 8 MHz or external clock up to 10 MHz
- Programmable clock sources
  - cascaded 32-bit timer output
  - external clock
  - timer/counter output of the last channel
  - Onboard 8 MHz clock

#### Cascaded Timer

- Number of channels: 1
- Counter width: 32 bits
- Compatibility: 5 V/TTL
- Base clock available: 8 MHz, fixed

#### Programmable De-bounce Filters for External Clocks

- Number of channels: 11
- Filtered inputs: external clock, external interrupt
- Glitch rejection pulse width: 4 periods of the de-bounce clock
- De-bounce clock: up to 2 MHz, programmable

#### Interrupt

- Number of interrupt sources: 2
- Sources: external interrupt input and output of counter #12

#### Digital I/O

- Number of channels: 8 inputs and 8 outputs
- Compatibility: 5 V/TTL
- Data transfers: programmed I/O

#### General Specifications

- I/O connector: 100-pin SCSI-II female
- Operating temperature: 0 to 60°C
- Storage temperature: -20 to 80°C
- Relative humidity: 5 to 95 %, non-condensing
- Power requirements

+5 V
350 mA typical

- Dimensions (not including connectors)  
134 mm x 107 mm

### Termination Boards

#### ■ DIN-100S-01

Termination Board with a 100-pin SCSI-II Connector and DIN-Rail Mounting (Cables are not included. For information on mating cables, refer to Section 12.)

Note:

Legacy DIN-502S can be replaced by two DIN-50S-01 and ACL-10252-1 (100-Pin to two 50-Pin Cable, 1 M)

### Ordering Information

- **PCI-8554**  
10-CH General Purpose Timer/Counter & 8-CH DIO Card

### Pin Assignment

+12Vout	1	51	GND
+12Vout	2	52	GOUT2
+12Vout	3	53	GIN2
+5Vout	4	54	GND
+5Vout	5	55	GOUT1
+5Vout	6	56	GIN1
N/C	7	57	E_INT
DI_6	8	58	DI_7
DI_4	9	59	DI_5
DI_2	10	60	DI_3
DI_0	11	61	DI_1
DO_6	12	62	DO_7
DO_4	13	63	DO_5
DO_2	14	64	DO_3
DO_0	15	65	DO_1
N/C	16	66	ECLK12
GND	17	67	COUT12
GND	18	68	ECLK11
GND	19	69	COUT11
GND	20	70	GND
GND	21	71	COUT10
GND	22	72	GATE10
GND	23	73	ECLK10
GND	24	74	COUT9
GND	25	75	GATE9
GND	26	76	ECLK9
GND	27	77	COUT8
GND	28	78	GATE8
GND	29	79	ECLK8
GND	30	80	COUT7
GND	31	81	GATE7
GND	32	82	ECLK7
GND	33	83	COUT6
GND	34	84	GATE6
GND	35	85	ECLK6
GND	36	86	COUT5
GND	37	87	GATE5
GND	38	88	ECLK5
GND	39	89	COUT4
GND	40	90	GATE4
GND	41	91	ECLK4
GND	42	92	COUT3
GND	43	93	GATE3
GND	44	94	ECLK3
GND	45	95	COUT2
GND	46	96	GATE2
GND	47	97	ECLK2
GND	48	98	COUT1
GND	49	99	GATE1
GND	50	100	ECLK1

1  
Software  
Solutions

2  
PXI/  
CompactPCI  
Platforms

3  
Modular  
Instrument

4  
PXI/  
CompactPCI  
Modules

5  
Bus  
Interface

6  
GPIO  
Interface

7  
PCI/PCI  
Express®  
DAQ Cards

8  
PCI/PCI  
Express®  
DIO Cards

9  
PC/104-Plus  
Modules

10  
ISA DAS/  
DIO Cards

11  
System  
Product

12  
Wiring  
Termination  
Boards

13  
Motion, HSL,  
Vision, COM  
& GEME

14  
Remote I/O  
Modules

15  
Industrial  
Computers