


HDC-304E

PCI Express video/audio capture card with four HDMI input channels and one HDMI output channel, 1920x1080@60p, and H.264 hardware codec



H.264 Hardware Codec

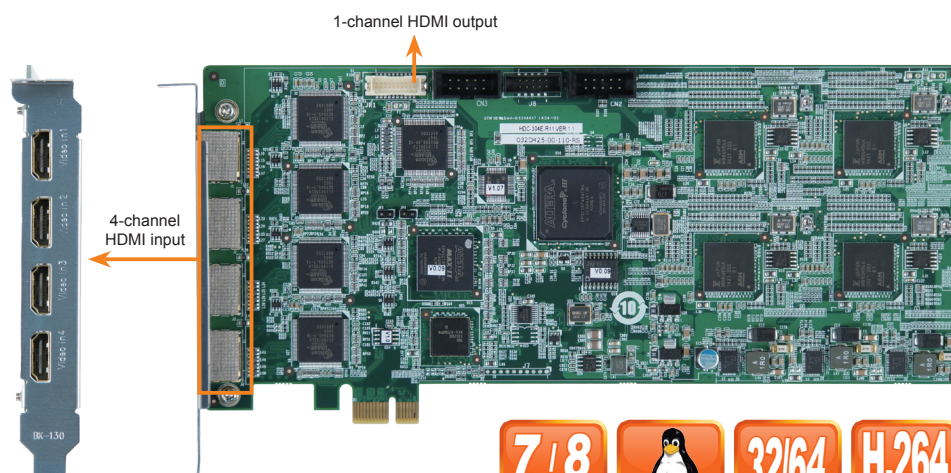

HDMI output cable



Features

- Compatible with Windows XP, Windows 8, Windows 7 and Linux
- Equipped with four HDMI input ports
- Encoding or decoding up to 1080p HD video
- Pass through for transmitting uncompressed video up to 1080p resolution
- Reduces the amount of hard disk space needed by real-time H.264 recording compression capability
- Enables the system to support up to 8-channel input by adding multiple video capture cards
- SDK available for customer to create customized applications
- PCI Express interface provides higher bandwidth and great performance

Specifications

Interface

Video Input	4 channels
Video Input type	HDMI
Audio Input	4 channels
Audio Input Type	HDMI
Video Output	1 channel
Video Output Type	HDMI output cable kit
Audio Output	1 channel
Audio Output Type	HDMI output cable kit
Bus Interface	PCIe x1
Loop Through	1 channel

Video Processing

Video Compression	H.264/AVC High Profile Level 4.2
Input Resolution & Frame Rate	1920 x 1080 x 60p / 59.94p / 50p 720 x 480 x 60i / 59.94i 1920 x 1080 x 60i / 59.94i / 50i 720 x 576 x 50i 1280 x 720 x 60p / 59.94p / 50p
Record Resolution / Frame Rate / Bit Rate	1920 x 1080 x 60p / 59.94p / 50p, encoding video bit rate from 6Mbps to 20Mbps 1920 x 1080 x 60i / 59.94i / 50i, encoding video bit rate from 6Mbps to 20Mbps 1280 x 720 x 60p / 59.94p / 50p, encoding video bit rate from 4Mbps to 20Mbps 720 x 480 x 60i / 59.94i, encoding video bit rate from 2Mbps to 10Mbps 720 x 576 x 50i, encoding video bit rate from 2Mbps to 10Mbps


Functionality

Multiple Card Support	Yes
-----------------------	-----

Audio Processing

Audio Compression	MPEG-1 Audio Layer 2
Bit Rate	256k

System Block

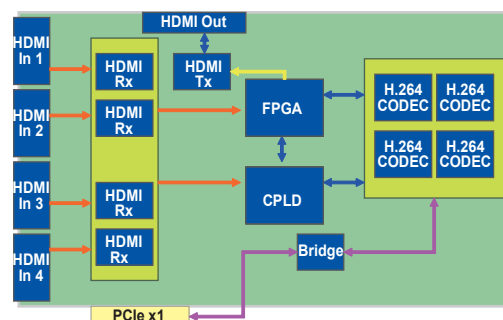

System Requirement

System	x86 PC compatible computer, Intel® Pentium® 4 2.0GHz or above for video record Recommends using a DXVA or CUDA capable graphics card for real-time video playback
Memory	1GB or more
OS Environment	Microsoft® Windows® XP Service Pack 2 (SP2) (32-bit version) Microsoft® DirectX 9.0c (32-bit) Microsoft® .NET Framework 2.0 (32-bit version) Linux Fedora 17 Kernel 3.3.4-5 (32-bit/64-bit) Microsoft Windows 7 (32-bit/64-bit) Microsoft Windows 8 (32-bit/64-bit)

Software Support

Device Driver	Compatible with Windows XP, Windows 8, Windows 7, Linux Fedora 17 Kernel 3.3.4-5
SDK	Windows®: Provides SDK and demo program with sample source code in C# Linux: Provides SDK and driver/demo program with sample source code in C

Others

Dimensions	230 mm x 116 mm
Operating Temperature	0°C ~ 65°C, non-condensing
Power Consumption	12.7W (12V@0.61A, 3.3V@1.63A)

Packing List

1 x HDC-304E capture card	
1 x HDMI output kit	
1 x Utility CD	1 x QIG

Ordering Information

Part No.	Description
HDC-304E-R11	PCI Express video/audio capture card with four HDMI input channels, 1920x1080@60p, and H.264 hardware codec

1
Industrial
Computing
Solutions

2
Video
Capture
Solutions

3
Embedded
Computing
Solutions

4
Automation
Control

5
ORing
Network
Communication

6
Power Supply/
Peripherals

7
Panel
Solutions
Introduction