


PIC0e-B650

Half-size PCIe CPU Card supports LGA 1155 32nm Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU with Intel® B65, DDR3, VGA, Dual Realtek PCIe GbE, USB 2.0, SATA 6Gb/s, HD Audio and RoHS

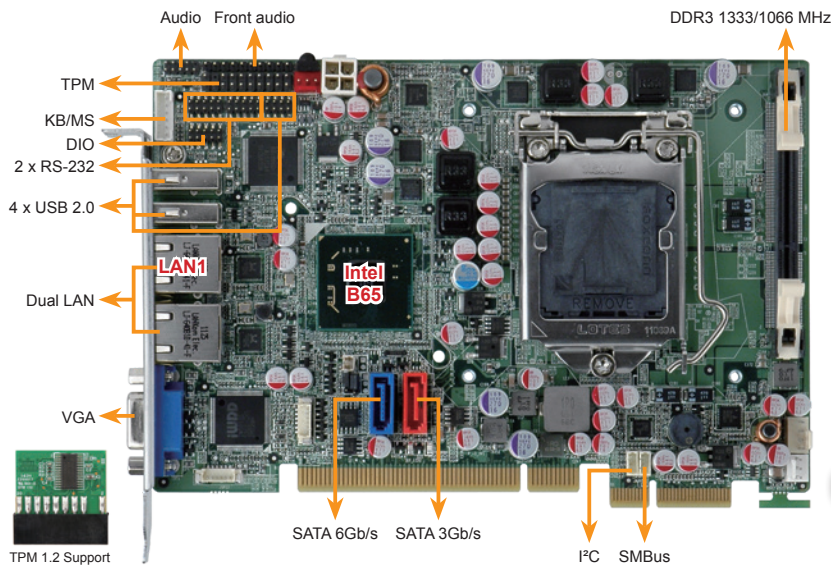

2nd Gen Intel® Core™ Processors (TDP=35W) Recommended List

CPU No.	Clock speed	Core	Smart cache	TDP
i5-2390T	2.7GHz	2	3M	35W
i3-2120T	2.6GHz	2	3M	35W
G630T	2.3GHz	2	3M	35W
G530T	2.0GHz	2	2M	35W
G440	1.6GHz	1	1M	35W



45W
CF-115XA-R10
1U chassis compatible



The 2nd generation Intel® processors provide advanced technology and intelligent performance.

Specifications

- ◆ CPU
LGA 1155 socket supports Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor
- ◆ Chipset
Intel® B65
- ◆ Memory
One 240-pin 1333/1066 MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMMs support up to 8 GB
- ◆ BIOS
UEFI
- ◆ Graphics Engine
Intel® HD Graphics Gen 6 supports DX10.1 and OpenGL 3.0
Full MPEG2, VC1, AVC decoding
- ◆ Display Output
1 x VGA (up to 2048x1536@75Hz)
- ◆ Ethernet
LAN1: Realtek RTL8111E PCIe GbE controller with ASF 2.0 support
LAN2: Realtek RTL8111E PCIe GbE controller
- ◆ External I/O Interface
2 x USB 2.0
- ◆ Internal I/O Interface
1 x KB/MS (1x6 pin) 1 x SATA 6Gb/s
1 x LPT (2x13 pin) 2 x RS-232 (2x5pin, P=2.0)
1 x SATA 3Gb/s 2 x USB 2.0 (2x4 pin, P=2.0)
- ◆ Audio
Supports 7.1-channel HD Audio by IEI AC-KIT-892HD-R10 kit
- ◆ Front Panel
1 x Front panel connector (1x10 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ TPM
1 x TPM (2x10 pin)
- ◆ SMBus
1 x SMBus (1x4 pin)
- ◆ I²C
1 x I²C (1x4 pin)
- ◆ Expansion
PCIe signal and PCI signal via golden finger
- ◆ Watchdog Timer
Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O
8-bit digital I/O (2x5 pin)
- ◆ Fan Connector
1 x CPU smart fan (1x4 pin)
1 x System smart fan (1x4 pin)
- ◆ Power Supply
5V/12V, AT/ATX support
- ◆ Power Consumption
5V@3.17A, 12V@0.46A, Vcore_12V@7.26A, 5VSB@0.18A
(3.4GHz Intel® Core™ i7-2600K with two 2 GB 1333 MHz DDR3 memory)
- ◆ Operating Temperature
-10°C ~ 60°C
- ◆ Storage Temperature
-20°C ~ 70°C
- ◆ Operating Humidity
5% ~ 95%, non-condensing
- ◆ Dimensions
185 mm x 122 mm
- ◆ Weight
GW: 1000g / NW: 260g
- ◆ CE/FCC compliant



Features

- ◆ Half-size PCIe CPU card with LGA 1155 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- ◆ One 1333/1066 MHz DDR3/DDR3L (1.35V) SDRAM SO-DIMM supports up to 8 GB
- ◆ On-board embedded controller supports infrared and PECI 2.0 technologies
- ◆ One SATA 6Gb/s and dual Realtek PCIe GbE
- ◆ TPM V1.2 hardware security provided by the TPM module
- ◆ IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Packing List

1 x PIC0e-B650 single board computer	
1 x Dual RS-232 cable with bracket	
1 x USB cable	1 x Mini jumper pack
2 x SATA cable	1 x QIG
1 x One Key Recovery CD	1 x Utility CD

Ordering Information

Part No.	Description
PIC0e-B650-R10	Half-size PCIe CPU card supports 32nm LGA 1155 Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU with Intel® B65, DDR3, VGA, dual Realtek PCIe GbE, USB 2.0, SATA 6Gb/s, HD Audio and RoHS
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
AC-KIT-892HD-R10	7.1-channel HD Audio kit with Realtek ALC892 supports dual audio streams
CF-115XA-R10	High-performance LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 73W
CPU-C-G440	Intel® Celeron® G440 processor, LGA -1155, single core 1.6GHz, 1M cache, 35W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i3-2120T	Intel® Core™ i3-2120T processor, LGA 1155, dual core 2.6GHz, 3M cache, 35W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i5-2390T	Intel® Core™ i5-2390T processor, LGA -1155, dual core 2.7GHz, 3M cache, 35W, AMT, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i5-2500T	Intel® Core™ i5-2500T processor, LGA -1155, quad core 2.3GHz, 6M cache, 45W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-P-G630T	Intel® Pentium® G630T processor, LGA 1155, dual core 2.3GHz, 3M cache, 35W, compatible with CF-1156C-R20 CPU cooler
SAIDE-KIT01-R10	SATA to IDE/CF converter board
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17

1

Industrial
Computing
Solutions

2

Video
Capture
Solutions

3

Industrial
System

4

Industrial
Computer
Chassis

5

Power Supply/
Peripherals