
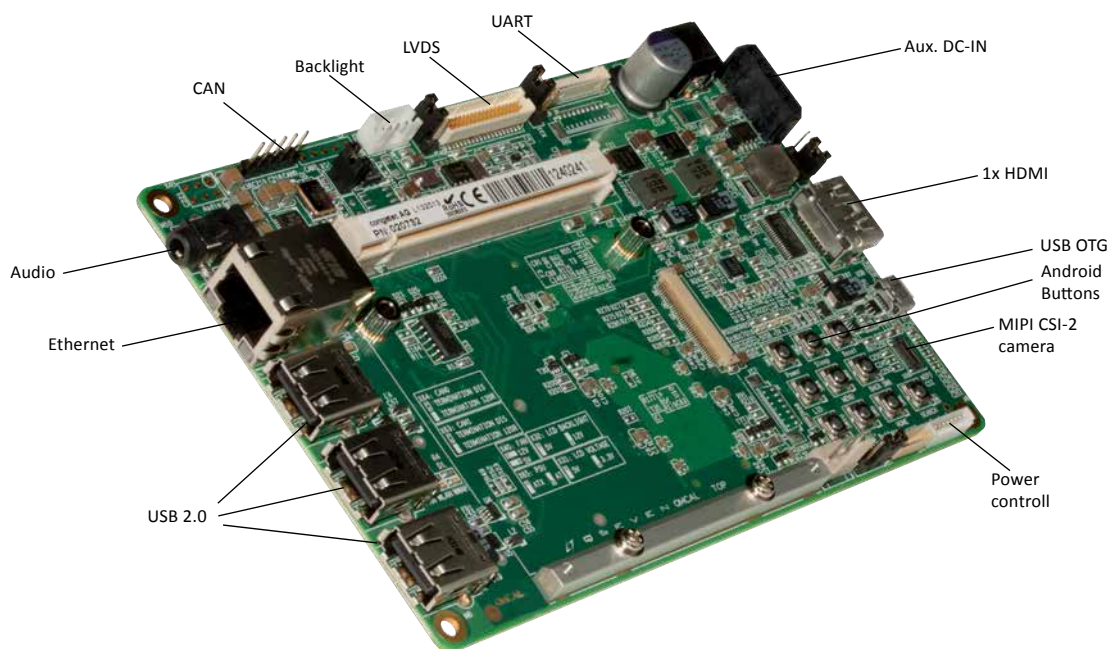


conga-MCB/Qseven ARM

Qseven® Mini Carrier Board for Qseven Arm Modules



Qseven® Mini Carrier Board for ARM Modules

The conga-MCB/ARM is a full featured carrier board for Qseven ARM modules.

1x miniPCI Express Socket

1x RJ45 connector with integrated Gigabit Ethernet Transformer

1x mSATA, 1x 8 bit SD Card Socket

3x USB 2.0 at the front panel

1x USB 2.0 at miniPCIe connector | 1x USB 2.0 OTG

1x CAN | 1x UART

1x HDMI

Single/Dual LVDS 18/24 bits

High Definition Audio with I2S Interface

1x MIPI CSI-2 camera interface

FAN

GPIOs

Androids Buttons / Power Button/Reset Button/Sleep Button/LID Button

Input Power Voltage: 12V

Temperature: Commercial: 0° to 60°C

Humidity: Operating 10 to 90% r. H. non cond.
Storage 5 to 95% r. H. non cond.

Dimension: 145 x 95mm

conga-MCB/Qseven ARM

Order Information

Article	PN	Description
conga-MCB/Qseven ARM	020732	Mini Carrier Board for ARM-Qseven with smart battery manager interface for mobile applications
MCB/Qseven Cable Kit	14000041	Cable kit for conga-MCB/Qseven

© 2013 congatec AG. All rights reserved. All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. The products may include software. Use of the software is subject to the terms and conditions set out in the respective owner's license agreements, which are available at www.congatec.com and/or upon request. Product names, logos, brands, and other trademarks featured or referred to within this datasheet, or the congatec website, are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG, our products, or our website.
Rev. September 6, 2013 MD