#### Datasheet

# 1.8" SATA SSD 3SR-P series

- Compliant with MIL-STD-810-F/G
- Data security (QEraser/ SEraser/ Destroy/ Write Protect)
- High random R/W performance
- iSMART disk health monitoring
- Intelligent error recovery system
- Enhanced power cycling management
- Conformal coating (optional)



#### Introduction


Innodisk 1.8" SATA SSD 3SR-P is a SATA III 6Gb/s Flash based disk, which delivers excellent performance and reliability. Especially, it comes with several data security functions, including QEraser/ SEraser/ Destroy and also Write Protect. All the security functions can be triggered both by hardware and software approaches. 1.8" SATA SSD 3SR-P is compliant with MIL-STD-810F/G standards. The SSD is equipped ruggedized hardware design and thus it can perform well in the harsh environment. 1.8" SATA SSD 3SR-P is developed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.



# 1.8" SATA SSD

# 3SR-P series

Drawing

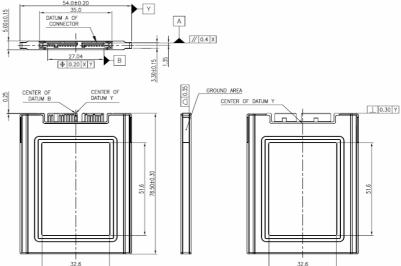

### **Specifications**

Specifications					
Interface	SATA III				
Flash Type	SLC				
Capacity	8GB~256GB				
Max. Channels	4				
Sequential R/W (MB/sec, max.)	490 / 340				
Max. Power Consumption	3 W (5V x 600 mA)				
Thermal Sensor	$\checkmark$				
External DRAM Buffer	$\checkmark$				
H/W Write Protect	$\checkmark$				
Pin7 Power	-				
ATA Security	√				
S.M.A.R.T.	√				
Dimension (WxLxH)	54.0 X 78.5 X 5.00 mm				
Environment	Vibration: 20G @7~2000Hz				
	Shock: 1500G @ 0.5ms				
	Storage Temperature: -55°C ~ +95°C				
	MTBF: 3 million hours				

© 2017 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

Contact us for more information

about the 1.8" SATA SSD 3SR-P

Innodisk is a service-driven provider of

industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud

computing industries.

20170322

## **Ordering Information**

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB
Standard Grade	DRS18-	DRS18-	DRS18-	DRS18-	DRS18-	DRS18-
(0°C ~ +70°C)	08GD67SCBQB	16GD67SCBQB	32GD67SCBQB	64GD67SCBQB	A28D67SCBQB	B56D67SCBQB
Industrial Grade	DRS18-	DRS18-	DRS18-	DRS18-	DRS18-	DRS18-
(-40°C ~ +85°C)	08GD67SWBQB	16GD67SWBQB	32GD67SWBQB	64GD67SWBQB	A28D67SWBQB	B56D67SWBQB



Contradata Milano S.r.l.

Via Solferino 12 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 Email: info@contradata.it