


# EMPS-3401


## mPCIe to four SATA III Module

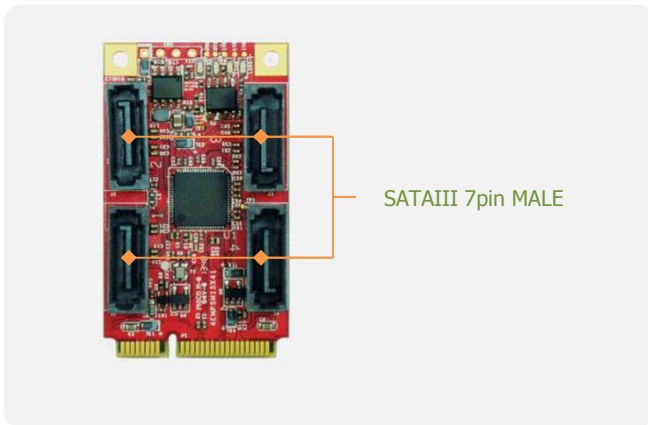

### Features

- mPCIe to four SATA III ports.
- Supports AHCI, Port-Multiplier.
- Supports Native Command Queuing
- Supports error reporting, recovery and correction.
- 30μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

### Mechanical Drawing

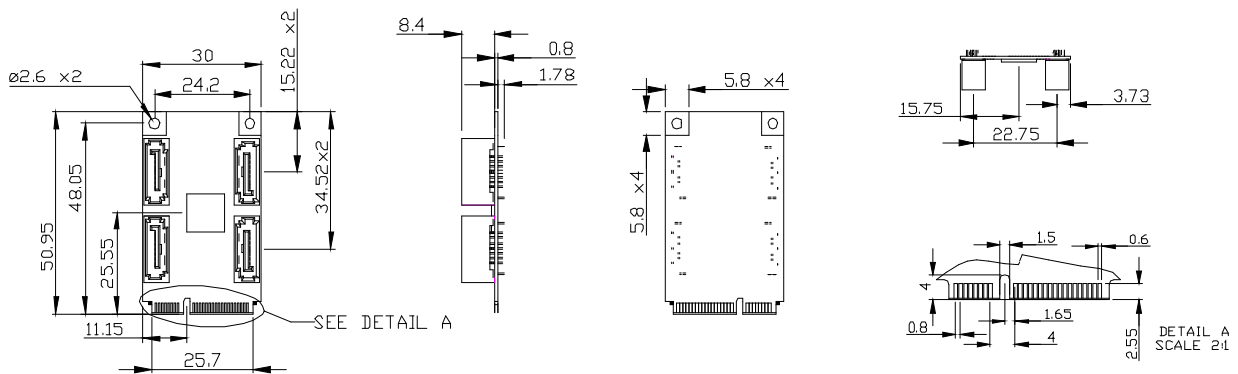

### Specifications

**Headquarters (Taiwan)**  
 5F., No. 237, Sec. 1, Datong Rd.,  
 Xizhi Dist., New Taipei City 221,  
 Taiwan  
 Tel: +886-2-77033000  
 Email: sales@innodisk.com

**Branch Offices:**  
**USA**  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
 +1-510-770-9421

**Europe**  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
 +31-040-282-1818

**Japan**  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
 +81-45-594-7581

**China**  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
 +86-755-21673689

[www.innodisk.com](http://www.innodisk.com)

© 2014 Innodisk Corporation.  
 All right reserved. Specifications  
 are subject to change without  
 prior notice.

May 22, 2015

Form-Factor	mPCIe
Input I/F	PCI Express 2.0
Output I/F	SATA III
Output Connector	SATA 7pin x 4
Bridge	Marvell 88SE9215
TDP	2.74W (3.3V x 830mA)
Dimension (WxLxH)	30 x 50.9 x 10.9 mm, Weight: 8.5g
Temperature	Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

### Order information

**EMPS-3401-C1**  
 mPCIe to four SATA III Module