
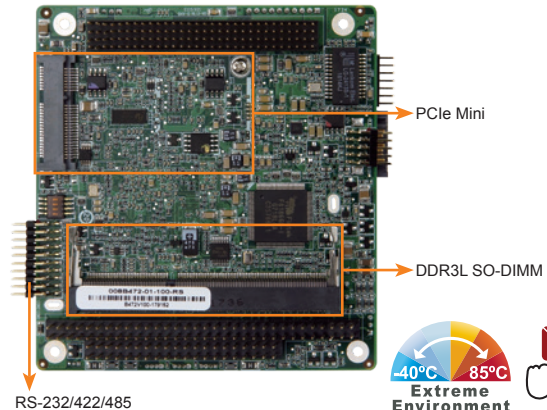


PM-BT

PC/104-Plus SBC with Intel® Atom™/Celeron® on-board SoC with DDR3L, VGA, LVDS, GbE, USB 2.0, SATA 3Gb/s, RS-232/422/485 and 5V DC input, RoHS

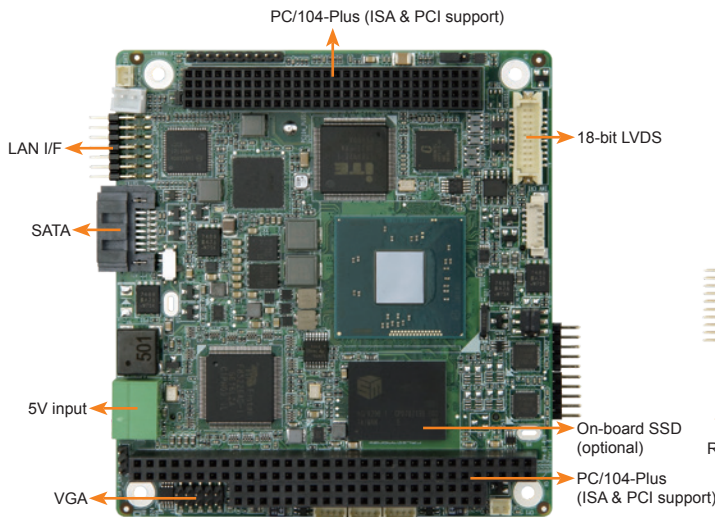


Specifications

- ◆ SoC
 - Intel® Atom™ E3845 on-board SoC (1.91GHz, quad-core, 2MB cache, TDP=10W)
 - Intel® Atom™ E3827 on-board SoC (1.75GHz, dual-core, 1MB cache, TDP=8W)
 - Intel® Atom™ E3826 on-board SoC (1.46GHz, dual-core, 1MB cache, TDP=7W)
 - Intel® Atom™ E3825 on-board SoC (1.33GHz, dual-core, 1MB cache, TDP=6W)
 - Intel® Atom™ E3815 on-board SoC (1.46GHz, single-core, 512KB cache, TDP=5W)
 - Intel® Celeron® J1900 on-board SoC (2GHz, quad-core, 2MB cache, TDP=10W)
 - Intel® Celeron® N2930 on-board SoC (1.83GHz, quad-core, 2MB cache, TDP=7.5W)
 - Intel® Celeron® N2807 on-board SoC (1.58GHz, dual-core, 2MB cache, TDP=4.3W)
- ◆ BIOS
 - AMI UEFI BIOS
- ◆ Memory
 - One 204-pin 1333/1066 MHz single-channel DDR3L SO-DIMM supports up to 8 GB (J1900, N2930, E3845, E3827, E3826, E3825, E3815) or 4 GB (N2807)
- ◆ Graphics Engine
 - Intel® HD Graphics Gen 7 Engine with four execution units, supporting DX11.1, OpenGL 4.2 and OpenCL 1.2
- ◆ Display Output
 - Dual independent display
 - 1 x VGA (up to 2560x1600@60 Hz)
 - 1 x 18/24-bit single-channel LVDS (2x10 pin)
- ◆ Ethernet
 - 1 x Intel® I210
- ◆ Super I/O
 - Fintek F81866
- ◆ Internal I/O Interface
 - 1 x SATA 3Gb/s with 5V SATA power connector
 - 3 x USB 2.0 (1x4 pin, P=1.25)
 - 2 x RS-232/422/485 (2x5, P=2.0)
- ◆ Storage
 - On-board SSD (optional, support by request)
- ◆ Front Panel
 - 1 x 10-pin header, P=2.0 (power LED, HDD LED, power button and reset button)
- ◆ Expansion
 - 1 x Full-size PCIe Mini slot (supports mSATA)
 - 1 x PC/104-Plus (ISA+PCI)
- ◆ Digital I/O
 - 1 x 8-bit digital I/O (2x5 pin, P=2.0)
- ◆ Power Supply
 - 5V DC input
 - 12V for fan, LVDS and PCI-104 plus
 - » 5V for PCI-104 plus (1x3 pin, P=2.0)
 - » 12V for PCI-104 plus (1x3 pin, P=2.0)
 - 3/5V jumper for PCI-104 plus
 - Support AT/ATX mode
 - ErP/EuP Compliant
- ◆ Watchdog Timer
 - Software programmable, supports 1~255 sec. system reset
- ◆ Operating Temperature
 - 20°C ~ 60°C (for J1900/N2930/N2807)
 - 40°C ~ 85°C (for E38xx)
- ◆ Storage Temperature
 - 40°C ~ 85°C
- ◆ Thermal
 - Heatsink
- ◆ Operating Humidity
 - 5% ~ 95%, non-condensing
- ◆ Dimensions
 - 96 mm x 90 mm
- ◆ Weight
 - GW: 500g / NW 120g
- ◆ CE/FCC compliant

Features

- PC/104 form factor SBC supports 22nm Intel® Atom™ on-board SoC
- PC/104-Plus (ISA and PCI signal) function support
- 5V DC input solution
- Support 2 COM, PCIe Mini, USB and optional on-board SSD
- Dual display from VGA and LVDS
- Wide range temperature support from -40°C ~ 85°C (for E38xx series CPU)
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Dimensions (Unit: mm)

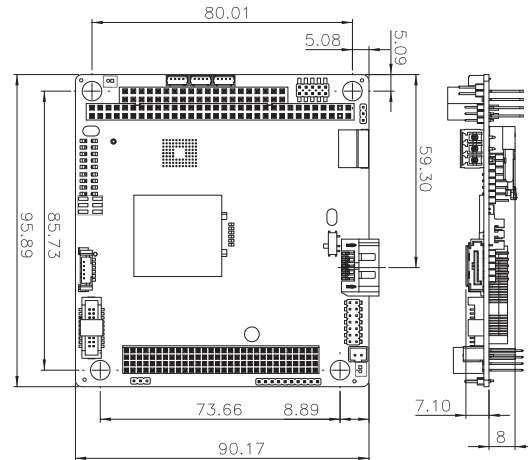

Packing List

1 x PM-BT single board computer	1 x SATA cable kit
1 x COM port cable	1 x Single-port USB cable
1 x LAN cable	1 x VGA cable

Ordering Information

Part No.	Description
PM-BT-J19001-R10	PC/104-Plus Single Board Computer with Intel® Atom™ J1900 SoC with DDR3L, VGA, LVDS, USB 2.0, SATA 3Gb/s, GbE, RS-232/422/485 and 5V DC input, RoHS
PM-BT-N28071-R10	PC/104-Plus Single Board Computer with Intel® Atom™ N2807 SoC with DDR3L, VGA, LVDS, USB 2.0, SATA 3Gb/s, GbE, RS-232/422/485 and 5V DC input, RoHS
PM-BT-E38451W2-R10	PC/104-Plus Single Board Computer with Intel® Atom™ E3845 SoC with DDR3L, VGA, LVDS, USB 2.0, SATA 3Gb/s, GbE, RS-232/422/485 and 5V DC input, RoHS, -40°C ~ 85°C
PM-BT-E38251W2-R10	PC/104-Plus Single Board Computer with Intel® Atom™ E3825 SoC with DDR3L, VGA, LVDS, USB 2.0, SATA 3Gb/s, GbE, RS-232/422/485 and 5V DC input, RoHS, -40°C ~ 85°C

**Note: Models with other CPUs not listed in the table are requested by MOQ - 100 pcs/lot.

1 Industrial Computing Solutions

2 Video Capture Solutions

3 Industrial System

4 Industrial Computer Chassis

5 Power Supply/Peripherals