


HIGH PERFORMANCE NXP i.MX8 SERIES

conga-SMX8




- NXP i.MX8 ARM Cortex-A72, Cortex-A53 and Cortex-M4F
- Advanced Graphics, Performance and Virtualization
- 3D Graphics up to 4K with HDMI 2.0a & LVDS
- Vision Extensions, MIPI CSI-2 dual camera interface
- Extended longevity up to 15 years
- Temperature range up to -40°C .. +85°C

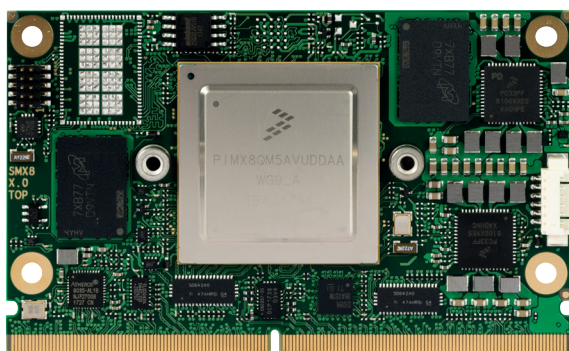

Formfactor	SMARC Specification 2.0 82x50 mm²				
CPU	NXP i.MX8 ARM Processor Cores				
		ARM Cortex-A72	ARM Cortex-A53	ARM Cortex-M4F	GPU
	i.MX8 QuadMax	2x	4x	2x	2x GC7000XSVX
	i.MX8 QuadPlus	1x	4x	2x	2x GC7000Lite/XSVX
	i.MX8 DualMax	2x	-	2x	2x GC7000Lite/XSVX
DRAM	Up to 8 GByte onboard LPDDR4 memory 3200 MT/s				
Ethernet	2x 1 Gbit Ethernet (opt. IEEE 1588 support)				
I/O Interfaces	5x USB 2.0 (shared with 1x USB OTG client) up to 1x USB 3.0 1x SATA III 1x SDIO 3.0 up to 2x PCIe 3.0 I²C Bus SPI QSPI 4x UART 2x FlexCAN optional M.2 1216 WiFi module (soldered down)				
Mass Storage	eMMC 5.1 up to 64 GByte Onboard MicroSD 3.0 card socket				
Sound	2x I²S				
Graphics	Integrated in NXP i.MX8 Series dual GT7000 multimedia GPU VPU (4K h.265 dec / HD h.264 enc) 2D Graphics (GPU2D) and 3D Graphics (GPU3D) 3D graphics with 4 high performance vec4 shaders up to 16 execution units 3 independent displays dual stream 1080p/720p decoder/encoder OpenGL 3.1 Vulkan VX extensions OpenCL 2.0				
Video Interfaces	HDMI 2.0a with HDCP 2.2 1x dual channel LVDS 24 bit eDP 1.4 output and DP 1.3 output (shared with HDMI) 1x MIPI-DSI with 4-lanes each shared with second LVDS channel 1x MIPI-CSI x4 and 1x MIPI-CSI x2				
Features	Watchdog Timer I²C bus 400 kHz JTAG debug interface High Precision Real Time Clock				
Virtualization	Multiple Domains with Hardware Virtualization Multiple Operating System Support System MMU Resource Partitioning and Split GPU				
Security	High Assurance Boot support Inline Encryption Engine (AES-128) TNG, AES-128, AES-256, 3DES, ARC4, RSA4096, SHA-1, SHA-2, SHA-256, MD-5 RSA-1024, 2048, 3072, 4096				
Boot Loader	U-Boot boot loader				
Operating Systems	Linux Yocto Android				
Power Consumption	Typ. application tbd. @ 5V				
Temperature	Operating:	0 to +60°C commercial grade -40 to +85°C industrial grade			
	Storage:	-40 to +85°C			
Humidity	Operating:	10 to 90% r. H. non cond.			
	Storage:	5 to 95% r. H. non cond.			
Size	82 x 50 mm (3,23" x 1,97")				

SMARC 2.0

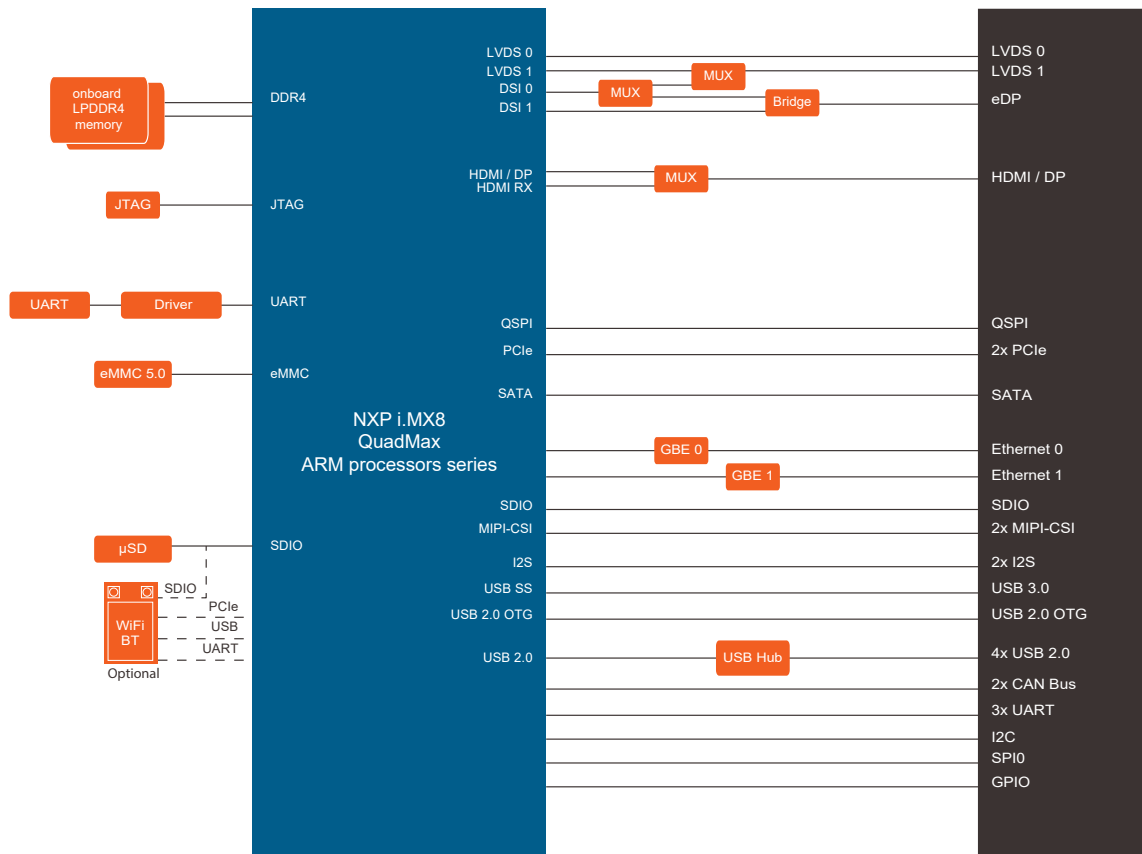

conga-SMX8 | Order Information

Article	PN	
conga- SMX8/QCM-4GB eMMC16	051000	SMARC 2.0 module with high-performance NXP i.MX8 Quad Max processor with 2x ARM Cortex-A72, 4x ARM Cortex-A53 and 2x ARM Cortex-M4F, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Commercial temperature range.
conga- SMX8/QCP-4GB eMMC16	051001	SMARC 2.0 module with high-performance NXP i.MX8 Quad Plus processor with 1x ARM Cortex-A72, 4x ARM Cortex-A53 and 2x ARM Cortex-M4F, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Commercial temperature range.
conga- SMX8/DCM-4GB eMMC16	051002	SMARC 2.0 module with high-performance NXP i.MX8 Dual Max processor with 2x ARM Cortex-A72 and 2x ARM Cortex-M4F, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Commercial temperature range.
conga-SMX8/QCP-2GB eMMC16	051003	SMARC 2.0 module with high-performance NXP i.MX8 QuadPlus processor with 1x ARM Cortex-A72, 4x ARM Cortex-A53 and 2x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Commercial temperature range.
conga-SMX8/DCM-2GB eMMC8	051004	SMARC 2.0 module with high-performance NXP i.MX8 DualMax processor with 2x ARM Cortex-A72 and 2x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 8GB onboard eMMC. Commercial temperature range.
conga- SMX8/i-QCM-4GB eMMC16	051020	SMARC 2.0 module with high-performance NXP i.MX8 Quad Max processor with 2x ARM Cortex-A72, 4x ARM Cortex-A53 and 2x ARM Cortex-M4F, 6GB onboard LPDDR4 memory and 16GB onboard eMMC.Industrial temperature range.
conga- SMX8/i-QCP-4GB eMMC16	051021	SMARC 2.0 module with high-performance NXP i.MX8 Quad Plus processor with 1x ARM Cortex-A72, 4x ARM Cortex-A53 and 2x ARM Cortex-M4F, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial temperature range.
conga- SMX8/i-DCM-4GB eMMC16	051022	SMARC 2.0 module with high-performance NXP i.MX8 Dual Max processor with 2x ARM Cortex-A72 and 2x ARM Cortex-M4F, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial temperature range.
conga-SMX8/i-QCP-2GB eMMC16	051023	SMARC 2.0 module with high-performance NXP i.MX8 QuadPlus processor with 1x ARM Cortex-A72, 4x ARM Cortex-A53 and 2x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial temperature range.
conga-SMX8/i-DCM-2GB eMMC8	051024	SMARC 2.0 module with ultra high-performance NXP i.MX8 DualMax processor with 2x ARM Cortex-A72 and 2x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 8GB onboard eMMC. Industrial temperature range.
conga-SMX8/i-CSP-B	051050	Passive cooling solution for SMARC 2.0 module conga-SMX8 with lidded NXP i.MX8 Quad Max ARM processor. All standoff s are with 2.7mm bore hole.
conga-SMX8/i-HSP-B	051051	Standard heatspreader for SMARC 2.0 module conga-SMX8 with lidded NXP i.MX8 Quad Max ARM processor. All standoff s are with 2.7mm bore hole.
SMARC/CSA-Adapter	051060	Active cooling solution adapter for SMARC 2.0 modules used in combination with module heatspreader.

Article	PN	
conqa-SEVAL	007010	Evaluation carrier coord for SMARC 2.0 modules.

© 2018 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. October 30, 2018 MR



Distributore Italia: Contradata Milano S.r.l.

Via Solferino 12 - 20900 Monza (MB) - Italy
Tel: (+39) 039-230.14.92 Email: info@contradata.it

www.contradata.it