


11TH GEN INTEL® CORE™ PROCESSORS

conga-HPC/cTLU

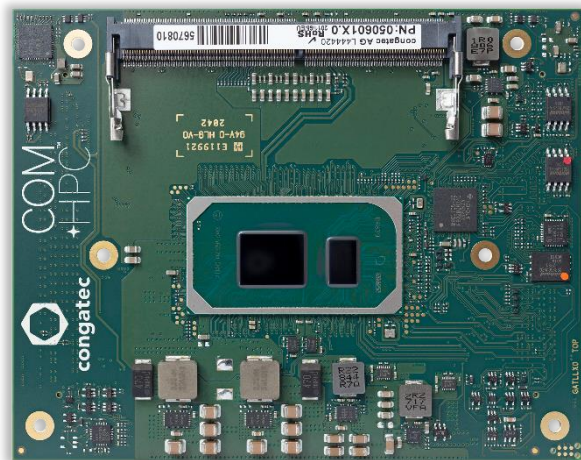

COM+HPC®


- Embedded/Industrial use condition
- Extended temperature options available
- PCI Express Gen 4
- Integrated high performance Xe (Gen 12) graphics with 96 EU
- AI/DL Instruction Sets including VNNI

Form Factor


COM-HPC, Size A (95 x 120 mm), Client Connector Pinout

CPU	ProcessorCores/ThreadsBase Frequency/max. TurboTDPGraphicsIntel Use Condition Core™ i7-1185G7E4C/8T1.80 GHz / 4.40 GHz12-28W96EUEmbedded Broad Market Core™ i5-1145G7E4C/8T1.50 GHz / 4.40 GHz12-28W80EUEmbedded Broad Market Core™ i3-1115G4E2C/4T2.20 GHz / 3.90 GHz12-28W48EUEmbedded Broad Market Celeron 6305E2C/2T1.80 GHz / --15W48EUEmbedded Broad Market Core™ i7-1185GRE4C/8T1.80 GHz / 4.40 GHz12-28W96EUIndustrial Core™ i5-1145GRE4C/8T1.50 GHz / 4.10 GHz12-28W80EUIndustrial Core™ i3-1115GRE2C/4T2.20 GHz / 3.90 GHz12-28W48EUIndustrial					
DRAM	Up to 2x SO-DIMM sockets for DDR4 memory modules up to 32 GByte each (64 GByte total) with 3200 MT/s					
Graphics	Integrated Xe (Gen 12) graphics engine with up to 96 EU (Execution Units) Supporting 4 independent display units (4x 4k/2x 8K) Enhanced media (AV1/12b) with up to 2 Vdbox Next Gen IPU6 with DPHY2.1 HDMI 2.0/2.1 DP 1.4					
Display	3x DP/HDMI/DP++ 1x eDP					
Ethernet	2x 2.5 GbE TSN Ethernet via Intel® i225					
I/O Interfaces	4x PCIe Gen4 8x PCIe Gen3 2x USB 4.0 2x USB 3.2 8x USB 2.0 2x SATA III (6Gb/s) SPI 2x UART 12x GPIO 2x MIPI-CSI					
Audio	1x I2S 2x SoundWire					
congatec Board controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics i ² C bus (fast mode, 400 kHz, multi-master) Power Loss Control Hardware Health Monitoring POST Code redirection					
Embedded BIOS Feature	AMI Aptio® UEFI firmware 32 Mbyte serial SPI with congatec Embedded BIOS feature OEM Logo OEM CMOS Defaults LCD Control Display Auto Detection Backlight Control Flash Update					
Security	Trusted Platform Module (TPM 2.0)					
Power Management	ACPI 5.0 with battery support					
Operating Systems	Microsoft® Windows 10 Microsoft® Windows 10 IoT Enterprise Microsoft® Windows IoT 10 Core Linux Android Yocto RTS Hypervisor					
Temperature Range	Commercial: Operating Temperature: 0 to +60°C Storage Temperature: -20 to +80°C Industrial: Operating Temperature: -40 to +85°C Storage Temperature: -40 to +85°C					
Humidity	Operating: 10 to 90% r. H. non cond. Storage 5 to 95% r. H. non cond.					
Size	95 x 120 mm ²					

conga-HPC/cTLU | Block Diagram

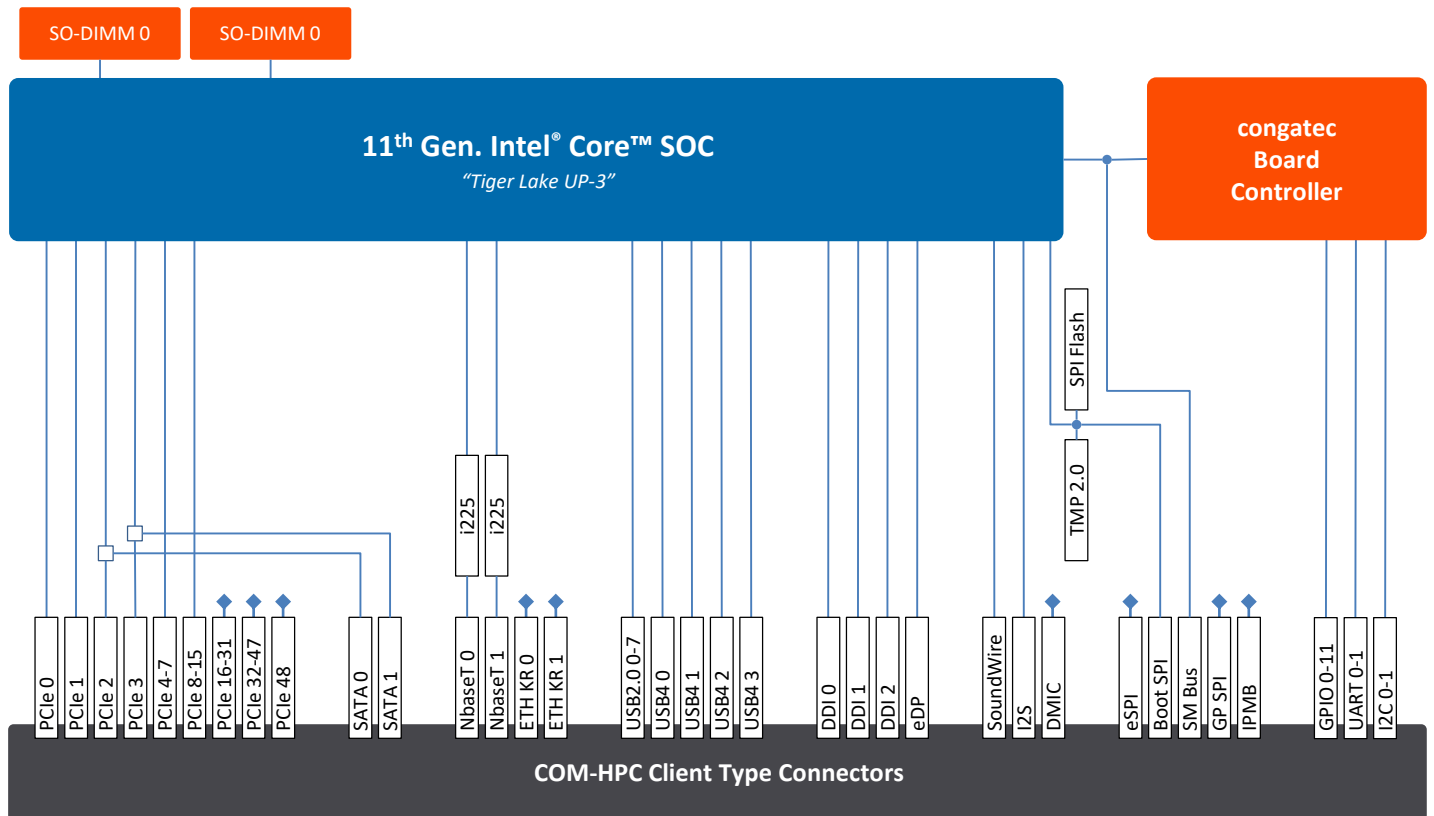

conga-HPC/cTLU | Bottom Side View

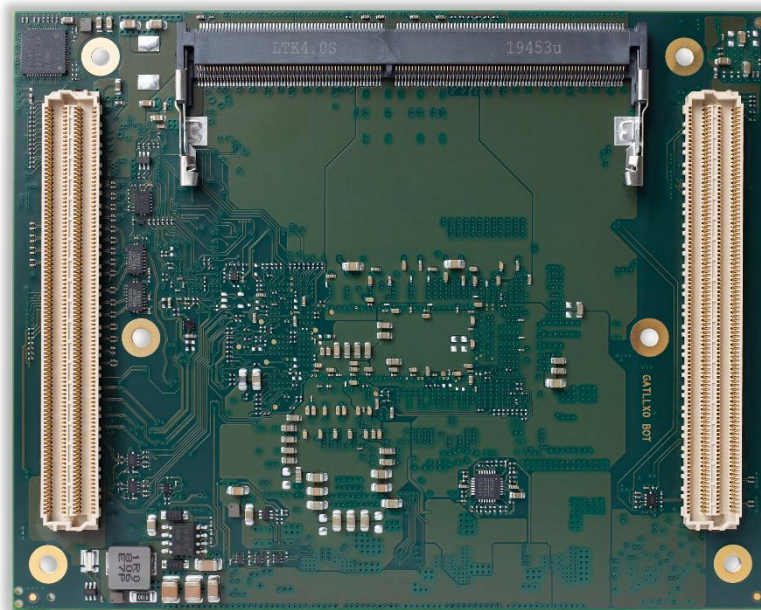

conga-HPC/cTLU | Order Information

Article	PN	Description
conga-HPC/cTLU-i7-1185G7E	050600	COM-HPC Size A module based on Intel® Core™ i7-1185G7E 4-core processor with 1.8GHz up to 4.4GHz turbo boost, 12MB cache, Intel® Iris® Xe Graphics with 96EU and dual channel DDR4 3200 MT/s memory interface (Intel Tiger Lake-UP3). Commercial temperature range.
conga-HPC/cTLU-i5-1145G7E	050601	COM-HPC Size A module based on Intel® Core™ i5-1145G7E 4-core processor with 1.5GHz up to 4.1GHz turbo boost, 8MB cache, Intel® Iris® Xe Graphics with 80EU and dual channel DDR4 3200 MT/s memory interface (Intel Tiger Lake-UP3). Commercial temperature range.
conga-HPC/cTLU-i3-1115G4E	050602	COM-HPC Size A module based on Intel® Core™ i3-1115G4E 2-core processor with 2.2GHz up to 3.9GHz turbo boost, 6MB cache, Intel® Iris® Xe Graphics with 48EU and dual channel DDR4 3200 MT/s memory interface (Intel Tiger Lake-UP3). Commercial temperature range.
conga-HPC/cTLU-6305E	050603	COM-HPC Size A module based on Intel® Celeron® 6305E 2-core processor with 1.8GHz, 4MB cache, Intel® Iris® Xe Graphics with 48EU and dual channel DDR4 3200 MT/s memory interface (Intel Tiger Lake-UP3). Commercial temperature range.
conga-HPC/cTLU-i7-1185GRE	050610	COM-HPC Size A module based on Intel® Core™ i7-1185GRE 4-core processor with 1.8GHz up to 4.4GHz turbo boost, 12MB cache, Intel® Iris® Xe Graphics with 96EU and dual channel DDR4 3200 MT/s memory interface (Intel Tiger Lake-UP3). Industrial temperature range.
conga-HPC/cTLU-i5-1145GRE	050611	COM-HPC Size A module based on Intel® Core™ i5-1145GRE 4-core processor with 1.5GHz up to 4.1GHz turbo boost, 8MB cache, Intel® Iris® Xe Graphics with 80EU and dual channel DDR4 3200 MT/s memory interface (Intel Tiger Lake-UP3). Industrial temperature range.
conga-HPC/cTLU-i3-1115GRE	050612	COM-HPC Size A module based on Intel® Core™ i3-1115GRE 2-core processor with 2.2GHz up to 3.9GHz turbo boost, 6MB cache, Intel® Iris® Xe Graphics with 48EU and dual channel DDR4 3200 MT/s memory interface (Intel Tiger Lake-UP3). Industrial temperature range.
conga-HPC/cTLU-CSA-HP-B	050658	Standard active cooling solution for high performance COM-HPC module conga-HPC/cTLU with integrated heatpipe, 29mm height and integrated 12V fan. All standoffs are with 2.7mm bore hole.
conga-HPC/cTLU-CSA-HP-T	050659	Standard active cooling solution for high performance COM-HPC module conga-HPC/cTLU with integrated heatpipe, 29mm height and integrated 12V fan. All standoffs are M2.5mm thread.
conga-HPC/cTLU-CSP-HP-B	050660	Standard passive cooling solution for high performance COM-HPC module conga-HPC/cTLU with integrated heatpipe, 28mm height. All standoffs are with 2.7mm bore hole.
conga-HPC/cTLU-CSP-HP-T	050661	Standard passive cooling solution for high performance COM-HPC module conga-HPC/cTLU with integrated heatpipe, 28mm height. All standoffs are with M2.5mm thread.
conga-HPC/cTLU-HSP-HP-B	050662	Standard heatspreader for high performance COM-HPC module conga-HPC/cTLU with integrated heatpipe, 13mm height. All standoffs are with 2.7mm bore hole.
conga-HPC/cTLU-HSP-HP-T	050663	Standard heatspreader solution for high performance COM-HPC module conga-HPC/cTLU with integrated heatpipe, 13mm height. All standoffs are with M2.5mm thread.
conga-HPC/EVAL-Client	065600	Evaluation Carrier Board for COM-HPC Client type Modules.



Distributore Italia: Contradata Milano S.r.l.

Via Solferino 12 - 20900 Monza (MB) - Italy
Tel: (+39) 039-230.14.92 Email: info@contradata.it

© 2021 congatec GmbH.
All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec GmbH. Product not yet released for mass production. Preliminary Revision 2.0 – February 17th 2021



www.contradata.it