

# EMBEDDED COM EXPRESS® TYPE 6

## conga-TCA7



- COM Express Type 6 Compact based on Intel® Atom® x6000E Series and Intel® Pentium® and Celeron® J and N Series processors
- High performance Intel® UHD Graphics (Gen11)
- Options for Industrial Temperature Range -40°C to 85°C
- Options for Time Sensitive Networking and Time Coordinated Computing for improved Realtime Capability
- 3.200 MT/s DDR4 SODIMM Memory Support

<b>Form Factor</b>	COM Express® Compact   Type 6   (95 x 95 mm)					
<b>CPU</b>	Processor	TDP	Cores/Threads	Base Frequ./Turbo	Gen 11 Gfx	Intel Use Condition
	J6413	10W	4 / 4	1.8 GHz / 3.0 GHz	16 EU	PC Client
	J6426	10W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	PC Client
	x6211E	6W	2 / 2	1.3 GHz / 3.0 GHz	16 EU	Embedded
	x6413E	9W	4 / 4	1.5 GHz / 3.0 GHz	16 EU	Embedded
	x6425E	12W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	Embedded
	x6212RE	6W	2 / 2	1.2 GHz / ---	16 EU	Industrial
	x6414RE	9W	4 / 4	1.5 GHz / ---	16 EU	Industrial
	x6425RE	12W	4 / 4	1.9 GHz / ---	32 EU	Industrial
<b>DRAM</b>	Support for 2x SO DIMM on socket (dual channel DDR4 3.200 MT/s)   max. 32 GB system capacity					
<b>Ethernet</b>	Intel® GbE with TSN support and Out-Of-Band Management   real-time trigger					
<b>I/O Interfaces</b>	Up to 6x PCIe Gen3   2x USB 3.1 Gen2   up to 8x USB 2.0   2x SATA III   2x UART (UART1 muxed with CAN)   GPIO   I <sup>2</sup> C Bus   SMBus   SPI   LPC					
<b>Mass Storage</b>	Option for onboard eMMC 5.1 flash up to 128 Gbyte					
<b>Audio</b>	Intel® HD Audio					
<b>Graphics</b>	Intel® UHD Graphics (Gen11)					
<b>LVDS</b>	Dual channel 18/24 bit LVDS interface up to 1920x1200@60Hz   shared with eDP up to 3840x2160@60Hz (option)					
<b>Digital Display Interface</b>	2x DisplayPort 1.4 4096x2160@60Hz					
<b>congatec Board controller</b>	Multistage watchdog   non-volatile user data storage   manufacturing and board Information   board statistics   fast mode and multi-master I <sup>2</sup> C bus   power loss control					
<b>Embedded BIOS Feature</b>	AMI Aptio® UEFI firmware   32 MByte serial SPI with congatec Embedded BIOS features   OEM Logo   OEM CMOS Defaults   LCD Control   Display Auto Detection   Backlight Control   Flash Update					
<b>Power Management</b>	ACPI 5.0 compliant   Smart Battery Management					
<b>Operating Systems</b>	Microsoft® Windows 10   Microsoft® Windows 10 IoT Enterprise   Microsoft® Windows IoT 10 Core   Linux (Yocto Project)   Android   RTS Hypervisor					
<b>Power Consumption</b>	Typ. Application: see manual for full details					
<b>Temperature Range</b>	Commercial: Operating Temperature: 0 to +60°C		Storage Temperature: -20 to +80°C			
	Industrial: Operating Temperature: -40 to +85°C		Storage Temperature: -40 to +85°C			
<b>Humidity</b>	Operating Humidity: 10 to 90% r. H. non cond. Storage Humidity: 5 to 95% r. H. non cond.					
<b>Size</b>	95 x 95 mm (approx. 3.74" x 3.74")					




Distributore per l'Italia: Contradata Milano S.r.l.

Via Solferino 12 - 20900 Monza (MB) - Italy  
Tel: (+39) 039-230.14.92 Email: info@contradata.it

[www.contradata.it](http://www.contradata.it)

# conga-TCA7 | Block Diagram

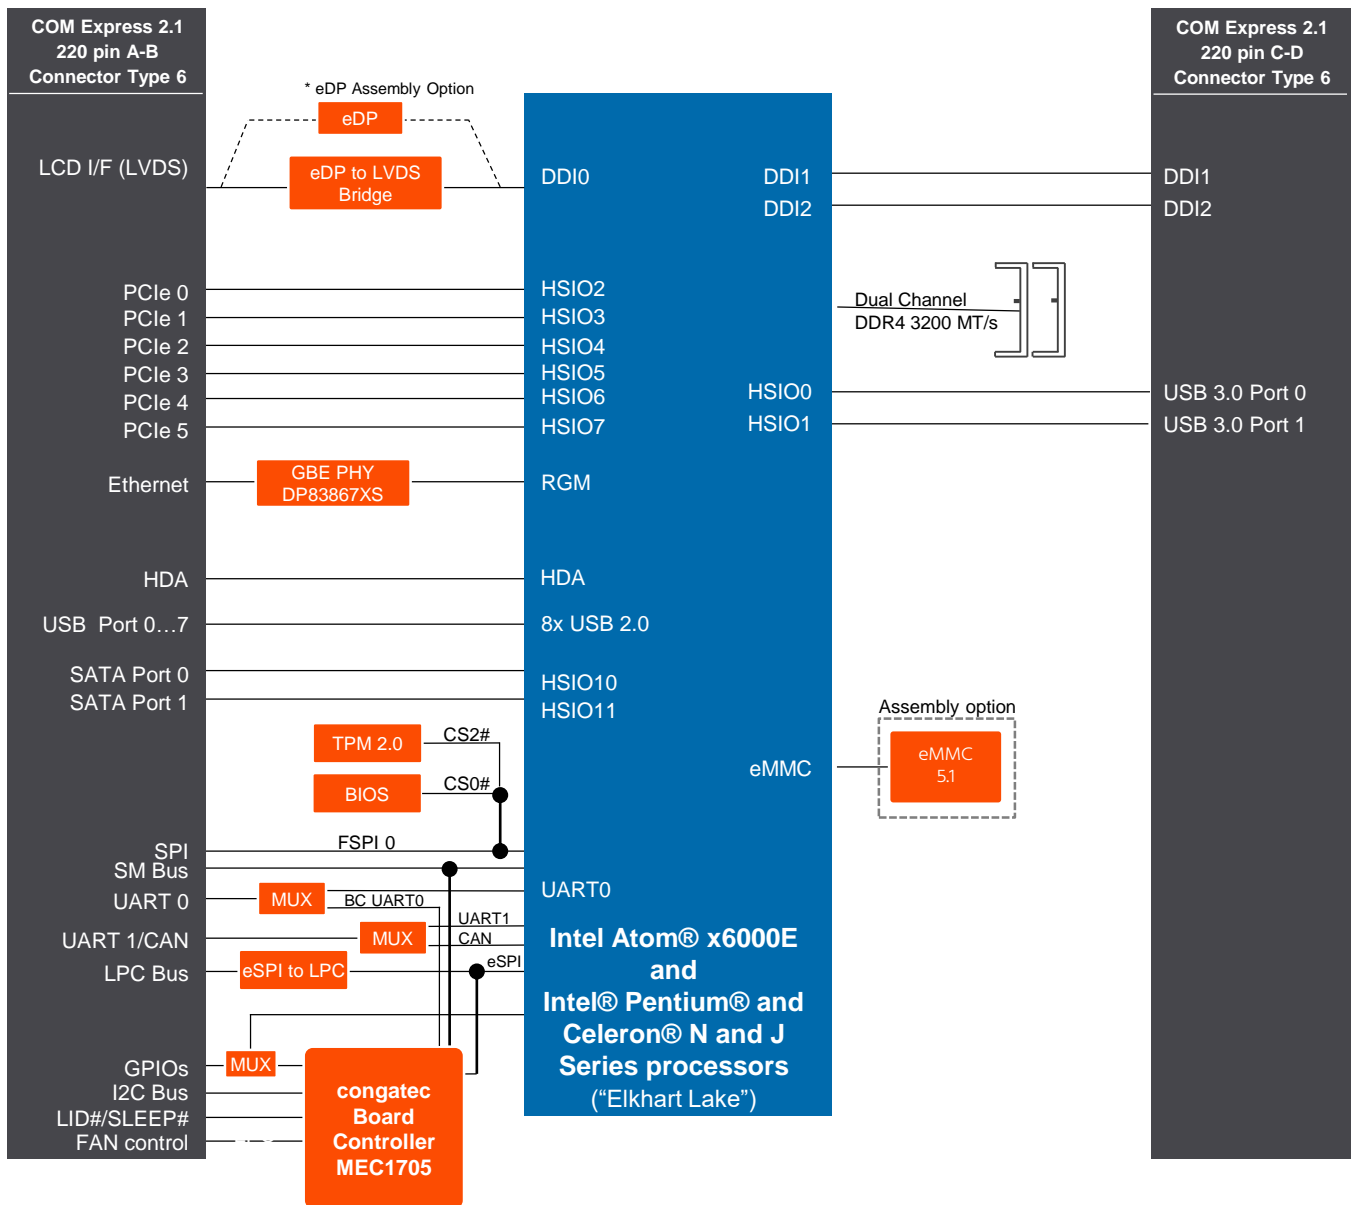

**Note:** Assembly options on request only

# conga-TCA7 | Order Information

Article	PN	Description
conga-TCA7/x6425E	049300	COM Express Compact module with Intel Atom® x6425E quad core processor with 2.0GHz core frequency up to 3.0GHz, 1.5MB cache and up to 32GB 3200MT/s DDR4 SODIMM memory support
conga-TCA7/x6413E	049301	COM Express Compact module with Intel Atom® x6413E quad core processor with 1.5GHz core frequency up to 3.0GHz, 1.5MB cache and up to 32GB 3200MT/s DDR4 SODIMM memory support
conga-TCA7/x6211E	049302	COM Express Compact module with Intel Atom® x6211E dual core processor with 1.3GHz core frequency up to 3.0GHz, 1.5MB cache and up to 32GB 3200MT/s DDR4 SODIMM memory support
conga-TCA7/i-x6425RE	049310	COM Express Compact module with Intel Atom® x6425RE quad core processor with 1.9GHz core frequency, 1.5MB cache and up to 32GB 3200MT/s DDR4 SODIMM memory support. Industrial grade temperature range from -40°C to 85°C.
conga-TCA7/i-x6414RE	049311	COM Express Compact module with Intel Atom® x6414RE quad core processor with 1.5GHz core frequency, 1.5MB cache and up to 32GB 3200MT/s DDR4 SODIMM memory support. Industrial grade temperature range from -40°C to 85°C.
conga-TCA7/i-x6212RE	049312	COM Express Compact module with Intel Atom® x6212RE dual core processor with 1.2GHz core frequency, 1.5MB cache and up to 32GB 3200MT/s DDR4 SODIMM memory support. Industrial grade temperature range from -40°C to 85°C.
conga-TCA7/J6426	049320	COM Express Compact module with Intel® Pentium® J6426 quad core processor with 2.0GHz core frequency up to 3.0GHz, 1.5MB cache and up to 32GB 3200MT/s DDR4 SODIMM memory support.
conga-TCA7/J6413	049321	COM Express Compact module with Intel® Celeron® J6413 quad core processor with 1.8GHz core frequency up to 3.0GHz, 1.5MB cache and up to 32GB 3200MT/s DDR4 SODIMM memory support



**Distributore per l'Italia: Contradata Milano S.r.l.**

Via Solferino 12 - 20900 Monza (MB) - Italy  
Tel: (+39) 039-230.14.92 Email: info@contradata.it

© 2021 congatec GmbH  
All rights reserved.



All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Product not yet released for Mass Production.  
Preliminary Revision 1.4 – March 24<sup>th</sup>, 2021

[www.contradata.it](http://www.contradata.it)