

Datasheet

# MicroSD Card 3IE2 series

- SD 3.0 interface
- Support Class 10 with UHS-I
- Adopt MLC NAND flash
- High performance
- Targeted for portable and stationary applications
- SMART function supported



## Introduction


Innodisk MicroSD 3IE2, supporting class 10 with UHS-I, are specifically designed for industrial PC and embedded applications. The 3.0 series SD card has latest firmware architecture and Flash algorithms, including superior wear leveling, and read disturb management ensuring highest reliability and endurance.

With its low power consumption and features above, Innodisk MicroSD 3IE2 series can be applied on industrial automation, SBC (single-board computer), medical equipment, infotainment, and mobile application.

# MicroSD Card

## 3IE2 series

### Diagram

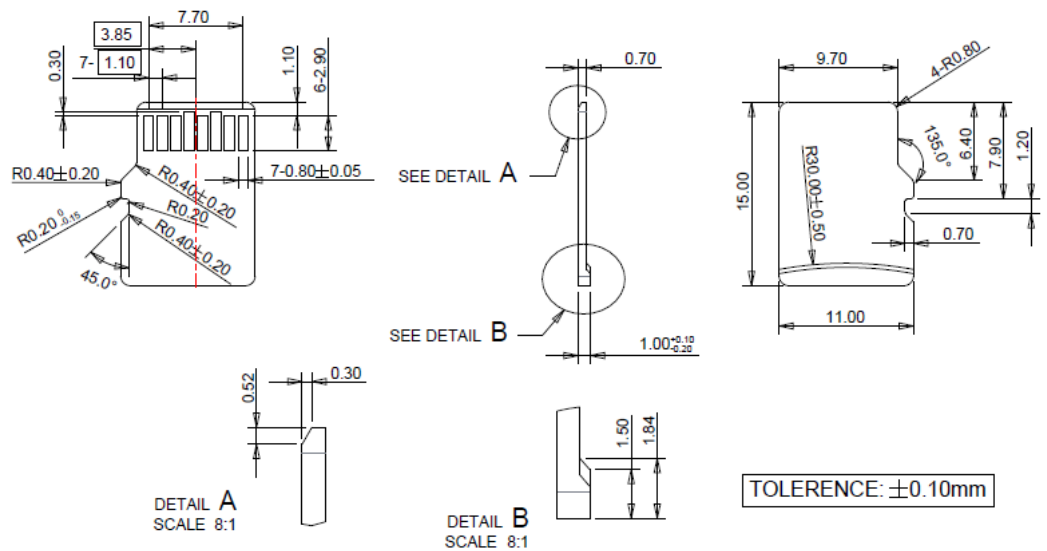

### Specifications

Interface	SD 3.0
Flash Type	iSLC
Capacity	4GB-32GB
Max. Channels	1
Sequential R/W (MB/sec, max.)	86/45
Max. Power Consumption	0.6W (3.3V x 208mA)
Thermal Sensor	-
Extended DRAM buffer	-
H/W Write Protect	-
ATA Security	-
S.M.A.R.T.	Y
Dimension (WxLxH)	11.0 X 15.0 X 1.0 mm
Environment	Vibration: 20G @ 7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -25°C ~ +85°C MTBF: 3 million hours

2018.5.3

### Ordering Information

Operation Temp.	4GB	8GB	16GB	32GB
Standard Grade (-25°C ~ +85°C)	DHSDM-04GE21SEASK	DHSDM-08GE21SEASK	DHSDM-16GE21SEASK	DHSDM-32GE21SEASK

**innodisk**

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



[www.contradata.it](http://www.contradata.it)