

APC-9150

Distributore per l'Italia: Contradata Milano S.r.l.

Via Solferino 12 - 20900 Monza (MB) - Italy
Tel: (+39) 039-230.14.92 Email: info@contradata.it

15", Capacitive Touch Screen, Android 10, Ture-Flat Android Panel PC



Features

- 15" LED backlight LCD and P-Cap Multi-Touch Panel
- Front Panel IP65
- Rockchip RK3399, ARM 2xCortex-A72+4xCortex-A53 1.8GHZ
- Panel and VESA Mounting



Specifications

System

CPU	Rockchip RK3399, ARM 2xCortex-A72+4xCortex-A53 1.8GHZ
GPU	Mali-T860 GPU MP4 GPU
Memory	DDR3 4GB
Storage	EMMC 16G/32G
Operating System	Android 10

Display

Size	15-inch
Resolution	1024 x 768
Viewing Angle	89/89/89/89
Color Support	16.7M
Brightness	350 cd/m ²
Contrast Ratio	1000:1
Response Time	3/0 (Typ.)(Tr/Td) ms
Backlight	LED
Backlight Life	50000h

Touch screen

Type	Projection multi touch capacitive touch screen
Control Interface	USB
Surface Hardness	≥6H
Transmittance	85%

I/O Connectors

Serial Port	1x RS-232
USB Port	4 x USB3.0
Ethernet	2 x GbE LAN
GPIO	1 x GPIO (Optional)
Others	1 x DC-IN (3-Pin Phoenix) 1 x Remote Switch Connector 1 x ATX Power Switch

Audio

Audio	1 x Line-out 1 x Line-in
Speaker	2 x Speaker (Optional)

Wireless

WIFI	2.4GHz/5GHz
M.2	M.2 3042 for 4G ; M.2 3052 for 5G ;

Power Specification

Power Input	9~36V
Power Adapter	AC-DC, 12V@5A, 60W
Power Consumption	13W (Typ.)



Environment

Operating Temperature	-10~50°C
Storage Temperature	-20~60°C
Relative Humidity	10%-90%, @ 40°C (non-condensing)
Vibration	5~500Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
Certifications	CE, FCC

Physical Characteristics

Hoasing	Aluminum Alloy Panel, All-metal Structure
Mounting Mode	Panel-mount, VESA-mount
Dimension (w X L X H)	369.9 x 293.9 x 51mm
Weight	3.45Kg

Dimension

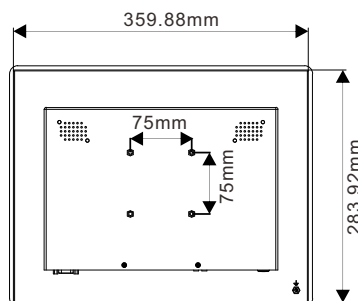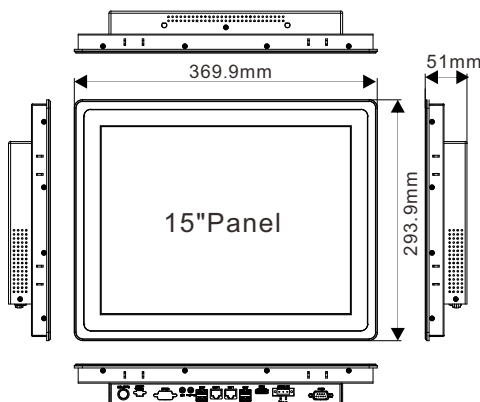

A: COM	G: Line-out
B: DC 9~36V	H: Mic
C: USB	I: COM2
D: LAN1	J: Remote Switch
E: LAN2	K: Power SW
F: USB	